

REVÊTOU

Revêtements Sols et Murs. Agencements

PARQUET STRATIFIÉ

COLLECTION 2021+



V1.21.04.29

E EGGER

Les sols EGGER offrent les avantages suivants :

- › Longévité grâce à une résistance durable à la décoloration, même en cas d'exposition intensive à la lumière du soleil.
- › Stabilité accrue grâce au système de pose breveté.
- › Propriétés anti-glissement contrôlées et certifiées.
- › Qualité contrôlée : les sols EGGER dépassent les normes légales. Chaque lame est contrôlée avant la livraison.
- › Réduction optimale des bruits grâce à des sous-couches isolantes adaptées au type de sol.
- › Garantie étendue grâce au système de construction.
- › Particulièrement durable, car entièrement recyclable.
- › Naturel, à base de bois et totalement exempt de PVC.

Structure des revêtements de sol stratifiés EGGER

Composition des sols stratifiés EGGER

- 1** Surface robuste, très résistante à l'abrasion
- 2** Papier décor
- 3** Panneau support HDF swell barrier en bois
- 4** Contrebalancement




Trouvez le décor adapté.

Notre visualiseur de sol vous aidera à voir comment un décor révèle votre pièce. Il vous suffit de charger une photo, de choisir le décor et de **transformer votre pièce** :



egger.com/myfloor

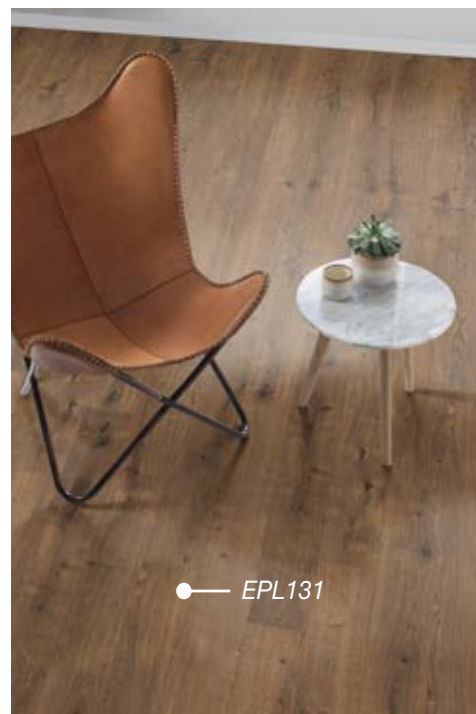

Poser un revêtement de sol est
une opération simple et rapide.



**Pose flottante avec le système
d'installation CLIC it!**

Pose facile

Facilité de mise en oeuvre : le système de pose CLIC it! permet de poser nos sols de manière sûre, rapide et facile dans n'importe quelle pièce.

Les propriétés hermétiques et l'ajustement optimal offrent une protection supplémentaire contre l'humidité.

Plus d'informations :
egger.com/clicit

Revêtement de sol EGGER Stratifié un sol au plus près du naturel

EGGER 7 mm



7mm - AC3 Page 07

EBL039
Chêne Falun



7mm - AC3 Page 08

EBL020
Chêne Belfort Argent



7mm - AC3 Page 09

EPL037
Chêne Trilogy Cappuccino



7mm - AC3 Page 10

EPL208
Chêne du Nord naturel

EGGER PRO 8 mm



8mm - AC3 Page 11

EPL036
Chêne Bardolino Gris



8mm - AC3 Page 12

EPL035
Chêne Bardolino



8mm - AC3 Page 13

EPL092
Chêne Zermatt beige sable




8mm - AC3 Page 14

EPL089
Chêne Grove



8mm - AC3 Page 15

EPL182
Chêne sauvage naturel



8mm - AC3 Page 16

EPL174
Bois d'Agira marron



8mm - AC3 Page 17

EPL137
Chêne Elton Blanc



8mm - AC3 Page 18

EPL109
Noyer Mansonia



8mm - AC4-4C Page 19

EPL046
Chêne Newbury clair



8mm - AC4-4C Page 20

EPL065
Noyer Langley clair



8mm - AC4-4C Page 21

EPL081
Chêne du Nord brun



8mm - AC4-4C Page 22

EPL050
Chêne de Corton noir



8mm - AC4-4C Page 23

EPL075
Chêne Dunnington foncé



8mm - AC4-4C Page 24

EPL074
Chêne Dunnington clair



8mm - AC4-4C Page 25

EPL100
Chêne du Nord cognac



8mm - AC4-4C Page 26

EPL096
Chêne Grayson naturel



8mm - AC4-4C Page 27

EPL179
Chêne Soria naturel



8mm - AC4-4C Page 28

EPL154
Chêne Asgil clair



8mm - AC4-4C Page 29

EPL175
Noyer Bedollo foncé



8mm - AC4-4C Page 30

EPL178
Chêne Soria gris clair



8mm - AC4-4C Page 31

EPL189
Chêne Melba beige



8mm - AC4-4C Page 32

EPL147
Chêne Olchon foncé



8mm - AC4-4C Page 33

EPL205
Chêne Sherman gris clair



8mm - AC4-4C Page 34

EPL177
Chêne Soria blanc



8mm - AC4-4C Page 35


EPL180
Chêne Soria gris



EPL191
Chêne Melba Marron



EPL204
Chêne Sherman marron clair




EPL038
Chêne calcaire




EPL190
Chêne Melba naturel




EPL102
Chêne d'Amiens clair



EPL095
Chêne de Brooklyn blanc



EPL078
Chêne Brynford brun




EPL140
Chêne Narva




EPL198
Chêne Predaia naturel




EPL156
Chêne Asgil miel




EPL095
Chêne Shannon miel



EPL011
Chêne Rillington clair



EPL012
Chêne Rillington foncé




EPL013
Chêne Ripon foncé


EGGER PRO 10 mm



EPL131
Chêne Punata




EPL159
Chêne Vallée naturel



EPL142
Chêne d'Olchon beige rosé


EGGER PRO 12 mm




EPL149
Chêne Cesena Nature



EPL150
Chêne Cesena gris



EPL144
Chêne d'Olchon miel



EPL146
Chêne d'Olchon fumé



EBL039
Chêne Falun
7mm - AC3



EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



EBL020
Chêne Belfort Argent
7mm - AC3



EPL037

Chêne Trilogy Cappuccino

7mm - AC3



EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



EPL208

Chêne du Nord naturel

7mm - AC3



EPL036

Chêne Bardolino Gris

8mm - AC3



EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



EPL035
Chêne Bardolino
8mm - AC3



EPL092

Chêne de Zermatt beige rosé

8mm - AC3



EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



EPL089
Chêne Grove
8mm - AC3



EPL182

Chêne sauvage naturel
8mm - AC3

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EPL174

Bois d'Agira marron
8mm - AC3

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL137
Chêne Elton Blanc
8mm - AC3

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EPL109
Noyer Mansonia
8mm - AC3

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL046

Chêne Newbury clair

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO - 8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



EPL065

Noyer Langley clair

8mm - AC4 - 4C

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL081
Chêne du Nord brun
8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EGGERPRO-8 mm

EPL050
Chêne de Corton noir
8mm - AC4 - 4C

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL075

Chêne Dunnington foncé

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



EPL074

Chêne Dunnington clair

8mm - AC4 - 4C





EPL100

Chêne du Nord cognac

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



EPL096
Chêne Grayson naturel
8mm - AC4 - 4C





EPL179

Chêne Soria naturel

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



EPL154
Chêne Asgil clair
8mm - AC4 - 4C





EPL175

Noyer Bedollo foncé

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EPL178
Chêne Soria gris clair
8mm - AC4 - 4C

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL189
Chêne Melba beige
8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EPL147

Chêne Olchon foncé

8mm - AC4 - 4C

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL205

Chêne Sherman gris clair

8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EPL177
Chêne Soria blanc
8mm - AC4 - 4C

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL180
Chêne Soria gris
8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EPL191
Chêne Melba Marron
8mm - AC4 - 4C

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL204

Chêne Sherman marron clair
8mm - AC4 - 4C

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EPL038
Chêne calcaire
8mm - AC4

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL190

Chêne Melba naturel

8mm - AC4

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EPL102
Chêne d'Amiens clair
8mm - AC4

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL095

Chêne de Brooklyn blanc
8mm - AC4

EGGER - 7mm

EGGERPRO - 8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



EGGERPRO-8 mm

EPL078

Chêne Brynford brun
8mm - AC4

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL140
Chêne Narva
8mm - AC4

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm



EPL198

Chêne Predaia naturel

8mm - AC4





EPL156
Chêne Asgil miel
8mm - AC4

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm



EPL105

Chêne Shannon miel
8mm - AC4

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL011
Chêne Rillington clair
8mm - Kingsize - AC4

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



EPL012

Chêne Rillington foncé
8mm - Kingsize - AC4

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL013
Chêne Ripon foncé
8mm - Kingsize - AC4

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



EPL131
Chêne Punata
10mm - AC4

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL159

Chêne Vallée naturel

10mm - AC4

EGGER - 7mm

EGGERPRO - 8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



EPL142

Chêne d'Olchon beige rosé
10mm - AC5

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm





EPL149
Chêne Cesena Nature
12mm - AC5

EGGER - 7mm

EGGERPRO-8 mm

EGGERPRO -10 mm

EGGERPRO -12 mm

EGGER -7mm




EGGERPRO-8 mm

EPL150
Chêne Cesena gris
12mm - AC5

EGGERPRO -10 mm

EGGERPRO -12 mm

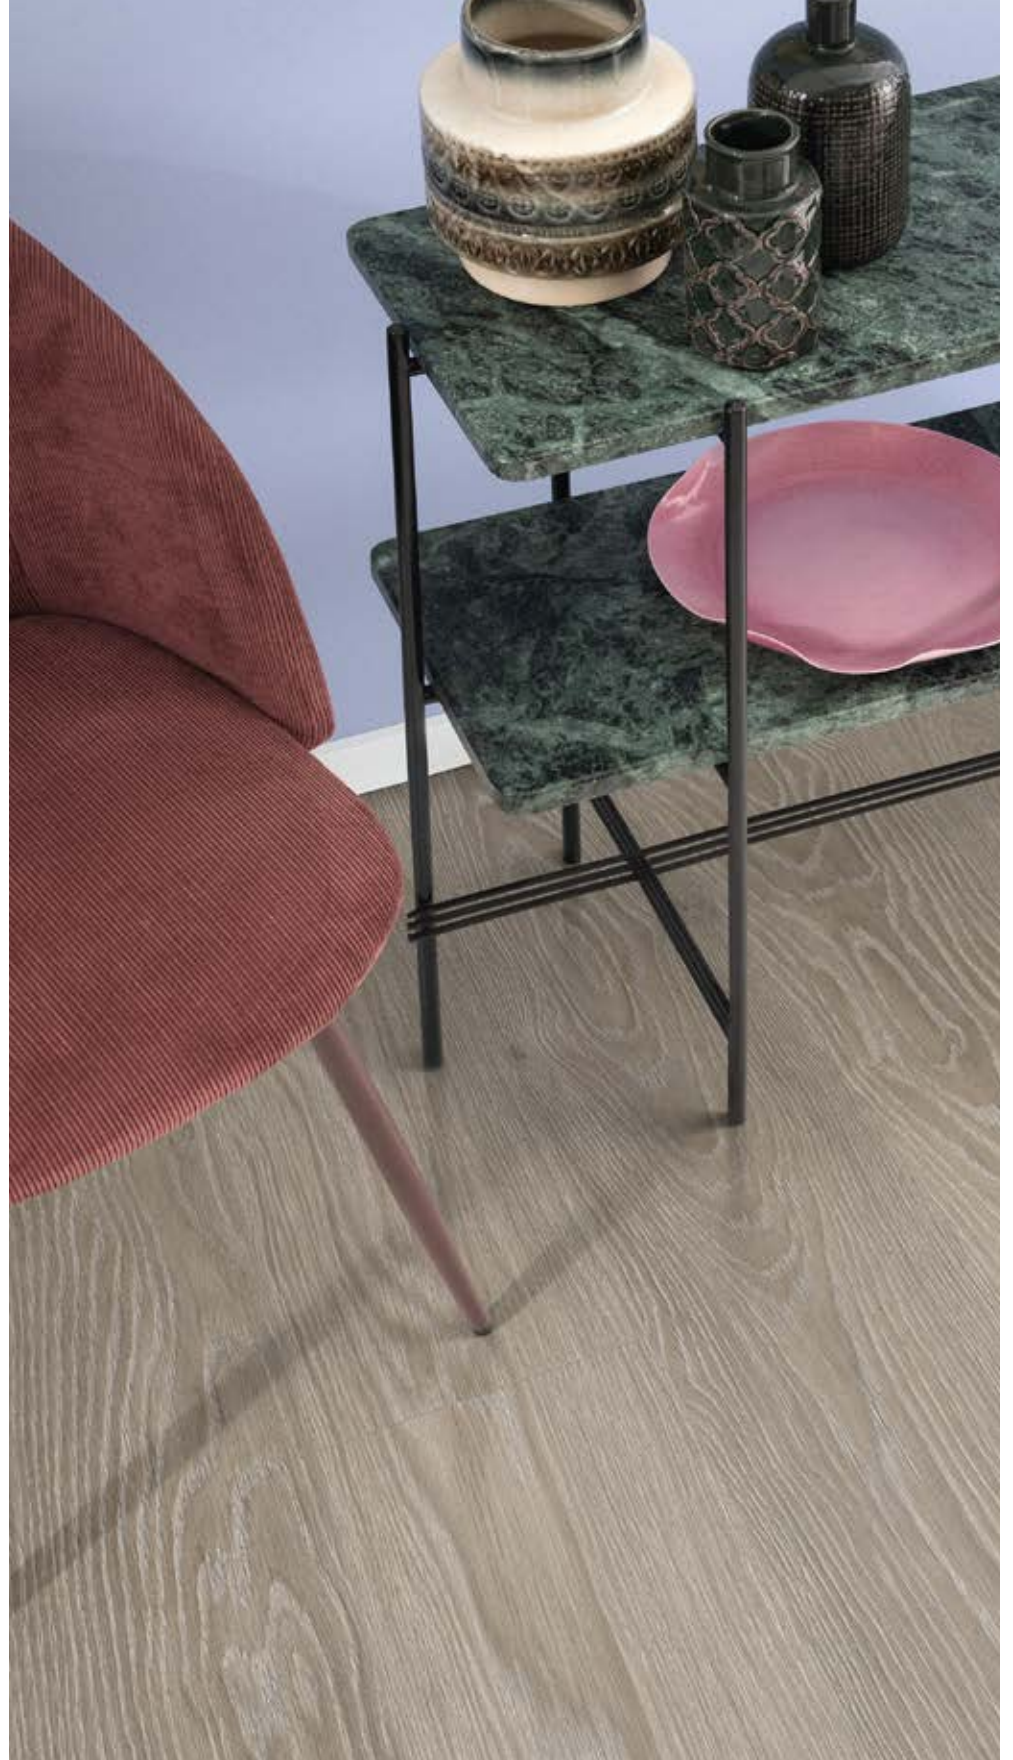



EPL144
Chêne d'Olchon miel
12mm - AC5

EGGER - 7mm

EGGERPRO - 8 mm

EGGERPRO - 10 mm

EGGERPRO - 12 mm

EGGER -7mm



EPL146
Chêne d'Olchon fumé
12mm - AC5

EGGERPRO-8 mm

EGGERPRO -10 mm


EGGERPRO -12 mm



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		7/ 31 Classic
Coreboard		HDF swell stopp plus
Profile		The patented EGGER installation system JUST clic! stands for quick and simple installation process without glue. Patented as JUST clic! EP 1 441 087 and EP 1 462 587
Guarantee domestic area		according to Egger Guarantee
Guarantee comercial area		according to Egger Guarantee
Antistatic properties according EN1815		yes, < 2 kV
Class of use	31	
European Norm EN13329		
Format	CLASSIC	
Dimension mm (length x width)	1292 x 192	
Complete thickness	7	
Thickness of silenizio® special cellulose Bevel	-	
Packaging		
Pallet	One-way-pallet	
Paket information		
	Piece	10
	m2	2,48
	kg	15,63
Pallet information		
	Piece	520
	m2	128,99
	kg	826,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E	AC3 (IP ≥ 2000)	
Impact resistance according EN13329, annex H	Große Kugel: ≥ 500 mm Kleine Kugel: ≥ 8 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 4	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 18 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,0 N/mm2	
Thermal resistance according to EN 12667	0,06 m² K/W	



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		8/ 31 Classic
Coreboard	E1 HCHO	HDF swell stopp plus
Profile	JUST clic! Patented	The patented EGGER installation system JUST clic! stands for quick and simple installation process without glue. Patented as JUST clic! EP 1 441 087 and EP 1 462 587
Guarantee domestic area	15 Y	according to Egger Guarantee
Guarantee comercial area	5 Y	according to Egger Guarantee
Antistatic properties according EN1815	Antistatic	yes, < 2 kV
Class of use	31	
European Norm EN13329	EN 13329-31	
Format	CLASSIC	
Dimension mm (length x width)	1292 x 192	
Complete thickness	8	
Thickness of silenizio® special cellulose	-	
Bevel	-	
Packaging		
Pallet	One-way-pallet	
Paket information		
	Piece	8
	m2	1,98
	kg	14,46
Pallet information		
	Piece	480
	m2	119,07
	kg	877,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E	AC3 (IP ≥ 2000)	
Impact resistance according EN13329, annex H	Big ball: ≥ 500 mm Small ball: ≥ 8 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 4	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 18 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,0 N/mm ²	
Thermal resistance according to EN 12667	0,07 m ² K/W	



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		8/32 Classic WV4 UF
Coreboard		HDF swell stopp plus
Profile		The patented UNI fit! installation system stands for a quick and simple installation process without glue. Produced under the licence of Flooring Industries™.
Guarantee domestic area		according to Egger Guarantee
Guarantee commercial area		according to Egger Guarantee
Antistatic properties according EN1815		yes, < 2 kV
Class of use	32	
European Norm EN13329		
Format	CLASSIC	
Dimension mm (length x width)	1291 x 193	
Complete thickness	8	
Thickness of silenzio® special cellulose		
Bevel	WV4	
Packaging	Packaging	
Pallet	One-way-pallet	
Paket information		
	Piece	8
	m2	1,99
	kg	14,46
Pallet information		
	Piece	480
	m2	119,40
	kg	877,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E	AC4 (IP ≥ 4000)	
Impact resistance according EN13329, annex H	Big ball: ≥ 750 mm Small ball: ≥ 12 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 4	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 18 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,25 N/mm2	
Thermal resistance according to EN 12667	0,07 m² K/W	



TECHNICAL DATASHEET	
EGGER PRO LAMINATE FLOORING	
8/32 Kingsize	
Coreboard	HDF swell stopp plus
Profile	The patented UNI fit! installation system stands for a quick and simple installation process without glue. Produced under the licence of Flooring Industries™.
Guarantee domestic area	according to Egger Guarantee
Guarantee comercial area	according to Egger Guarantee
Antistatic properties according EN1815	yes, < 2 kV
Class of use	32
European Norm EN13329	EN 13329-32
Format	KINGSIZE
Dimension mm (length x width)	1291 x 327
Complete thickness	8
Thickness of silenizio® special cellulose	
Bevel	WV2 -
Pallet	Packaging One-way-pallet
Paket information	
Piece	6
m2	2,53
kg	18,31
Pallet information	
Piece	240
m2	101,20
kg	755,00
Classification and general requirements according EN13329	
Abrasion resistance according EN13329, annex E	AC4 (IP ≥ 4000)
Impact resistance according EN13329, annex H	Big ball: ≥ 750 mm Small ball: ≥ 12 N
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 4
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage
Thickness swelling according ISO 24336	≤ 18 %
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)
Static indentation by constant pressure according EN ISO 24343-1	< 0,05
Surface soundness according EN13329, annex D	≥ 1,25 N/mm ²
Thermal resistance according to EN 12667	0,07 m ² K/W



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		8/32 Classic
Coreboard		HDF swell stopp plus
Profile		The patented EGGER installation system JUST clic! stands for quick and simple installation process without glue. Patented as JUST clic! EP 1 441 087 and EP 1 462 587
Guarantee domestic area		according to Egger Guarantee
Guarantee commercial area		according to Egger Guarantee
Antistatic properties according EN1815		yes, < 2 kV
Class of use	32	
European Norm EN13329		
Format	CLASSIC	
Dimension mm (length x width)	1292 x 192	
Complete thickness	8	
Thickness of silenzio® special cellulose Bevel	-	
Pallet	Packaging One-way-pallet	
Paket information		
	Piece	8
	m ²	1,98
	kg	14,46
Pallet information		
	Piece	480
	m ²	119,07
	kg	877,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E	AC4 (IP ≥ 4000)	
Impact resistance according EN13329, annex H	Big ball: ≥ 750 mm Small ball: ≥ 12 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 4	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 18 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,25 N/mm ²	
Thermal resistance according to EN 12667	0,07 m ² K/W	



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		10/32 WV4
Coreboard	E1 HCHO	HDF swell stopp plus
Profile		The patented UNI fit! installation system stands for a quick and simple installation process without glue. Produced under the licence of Flooring Industries™.
Guarantee domestic area		according to Egger Guarantee
Guarantee comercial area		according to Egger Guarantee
Antistatic properties according EN1815		yes, < 2 kV
Class of use		32
European Norm EN13329		EN 13329-32
Format		CLASSIC
Dimension mm (length x width)		1291 x 193
Complete thickness		10
Thickness of silenzio® special cellulose Bevel		WV4
Pallet		Packaging One-way-pallet
Paket information		
	Piece	7
	m2	1,74
	kg	15,99
Pallet information		
	Piece	364
	m2	90,70
	kg	853,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E		AC4 (IP ≥ 4000)
Impact resistance according EN13329, annex H		Big ball: ≥ 750 mm Small ball: ≥ 12 N
Resistance to staining EN438		Group 1 + 2: level 5 group 3: level 4
Effect of furniture leg according EN424		No damage shall be visible, when tested with foot Type 0 artefact
Effect of a castor chair according EN425 (Type W)		No change in appearance or damage
Thickness swelling according ISO 24336		≤ 18 %
Tolerance of top layer according EN13329		length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm
Light fastness according EN13329		grey scale ≥ level 4 (EN:20105-A02)
Static indentation by constant pressure according EN ISO 24343-1		< 0,05
Surface soundness according EN13329, annex D		≥ 1,25 N/mm ²
Thermal resistance according to EN 12667		0,08 m ² K/W



TECHNICAL DATASHEET		
EGGER PRO LAMINATE FLOORING		12/33 Classic
Coreboard	E1 HCHO	HDF swell stopp plus
Profile	UNI FIT	The patented UNI fit! installation system stands for a quick and simple installation process without glue. Produced under the licence of Flooring Industries™.
Guarantee domestic area	25 years	according to Egger Guarantee
Guarantee comercial area	5 years	according to Egger Guarantee
Antistatic properties according EN1815	Antistatic	yes, < 2 kV
Class of use	33	
European Norm EN13329	EN 13329-33	
Format	CLASSIC	
Dimension mm (length x width)	1291 x 193	
Complete thickness	12	
Thickness of silenzio® special cellulose		
Bevel	WV4	
Pallet	Packaging	
Pallet	One-way-pallet	
Paket information		
	Piece	6
	m2	1,49
	kg	16,31
Pallet information		
	Piece	312
	m2	77,74
	kg	860,00
Classification and general requirements according EN13329		
Abrasion resistance according EN13329, annex E	AC5 (IP ≥ 6000)	
Impact resistance according EN13329, annex H	Big ball: ≥ 1000 mm Small ball: ≥ 15 N	
Resistance to staining EN438	Group 1 + 2: level 5 group 3: level 5	
Effect of furniture leg according EN424	No damage shall be visible, when tested with foot Type 0 artefact	
Effect of a castor chair according EN425 (Type W)	No change in appearance or damage	
Thickness swelling according ISO 24336	≤ 15 %	
Tolerance of top layer according EN13329	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	
Light fastness according EN13329	grey scale ≥ level 4 (EN:20105-A02)	
Static indentation by constant pressure according EN ISO 24343-1	< 0,05	
Surface soundness according EN13329, annex D	≥ 1,25 N/mm2	
Thermal resistance according to EN 12667	0,09 m² K/W	



REVÊTOU



 www.revetou.com

 [revetou_mar](https://www.instagram.com/revetou_mar)

 [Revetou](https://www.facebook.com/Revetou)

Siège social CASABLANCA

Tél : +212 5 22 94 36 34

Fax : +212 5 22 94 36 15

Email : contact@revetou.com

Adresse : 51 rue Attabari, 20100,
Maarif, Casablanca - Maroc

Succursale RABAT

Tél : +212 5 37 79 69 16

Fax : +212 5 37 79 69 58

Email : rabat@revetou.com

Adresse : 34 Av. Fadila Yac Al Mansour
10052, RABAT - Maroc

Succursale TANGER

Tél : +212 5 39 39 55 96

Fax : +212 5 39 39 55 98

Email : tanger@revetou.com

Adresse : Lot 264 – Zone Industrielle
de Gueznaya, Tanger - Maroc